


Supplemental figures: Silhouette plots of k-means and hierarchical clustering with $k = [2, \dots, 5]$ clusters

Supplemental Figure S1: k-means based clusters, using the Euclidean distance between the retained principal components. The figure has been created using Python version 3.8.12 for Linux (<https://www.python.org>) and Seaborn Python data visualization library (<https://seaborn.pydata.org>).



Supplemental Figure S2: Hierarchical (Ward) based clusters using the Euclidean distance between the retained principal components. The figure has been created using Python version 3.8.12 for Linux (<https://www.python.org>) and Seaborn Python data visualization library (<https://seaborn.pydata.org>).

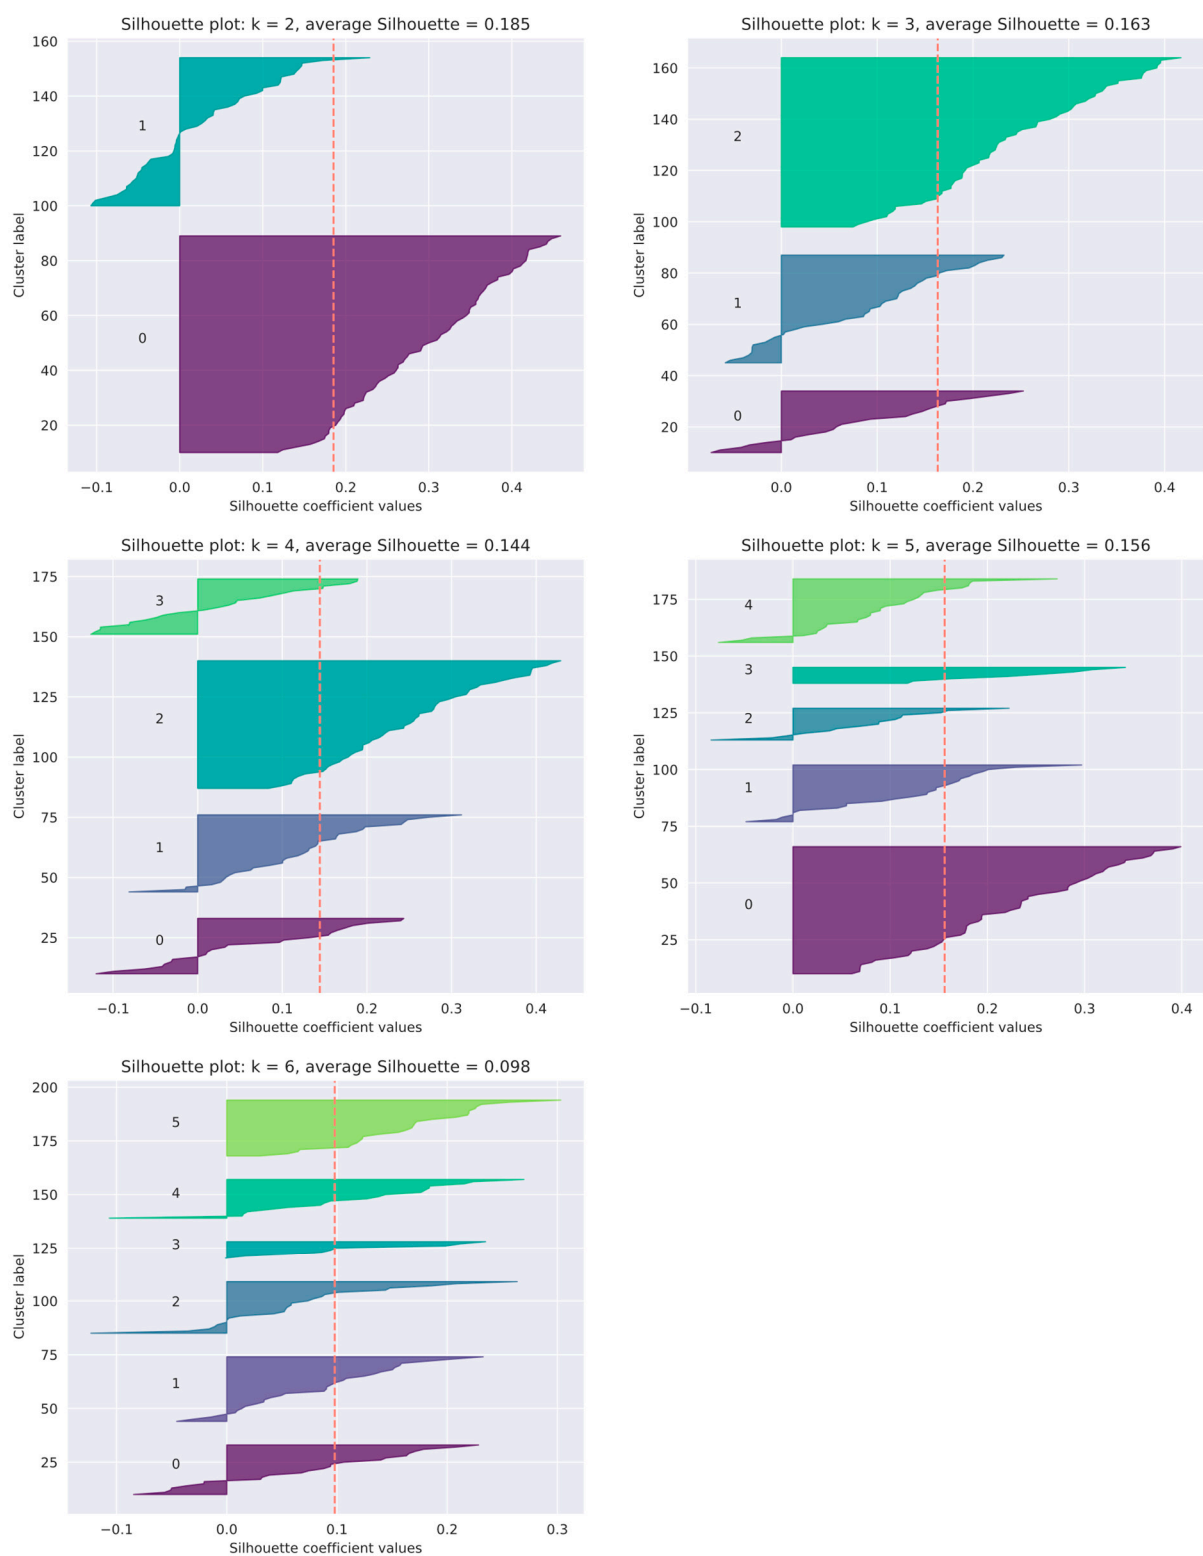